



Based on the innovative “Double Balanced Microphone Amplifier” circuit published by Graham John Cohen in 1984, the C84 microphone preamp offers exceptional performance in any application where extremely low distortion and neutral sonic characteristics are desired.

Who Should Build This Kit?

The C84 is not difficult to build, but it is not intended for beginners. If you’ve never built an electronic project before, this is definitely not the one to start with. To guarantee success, make sure you have:

- The ability to make basic voltage and resistance measurements using a digital multimeter (DMM).
- At least a rudimentary understanding of voltage, current, and resistance.
- Some experience soldering on printed circuit boards.
- The patience to follow instructions precisely and work carefully.

Essential Tools

Fine tipped, 20-30 watt soldering iron w/ cleaning sponge (Hakko 936 or similar)
Eutectic (63/37) rosin core or “no clean” solder (.025” diameter or smaller is best)
Good-quality DMM
Small needle nose pliers
Small diagonal cutters
Phillips screwdriver (#1)
Precision straight blade screwdriver (for adjusting potentiometers)

Highly Recommended Tools

Lead bender (Mouser 5166-801)
T-Handle wrench and 4-40 tap (Hanson 12001 and 8012)
MOLEX crimp tool (Waldom W-HT1919 or equivalent)
Magnifying glass

Optional Tools

Panavise w/ circuit board head
Oscilloscope
Signal generator

Work Area

Find a clean, flat, stable, well-lit surface on which to work. An anti-static mat is recommended for this project. If you're in a dry, static-prone environment, it's essential. The importance of good lighting can't be overstated. Component markings are tiny, and you'll be deciphering a lot of them.

Soldering Technique

Make sure your iron's tip is tinned properly and keep it clean! The trick to making perfect solder joints is to heat the joint quickly and thoroughly before applying the solder, and a properly tinned and clean tip is essential for this. Apply enough solder to form a "fillet" between the lead and the pad, a little mound of solder that smoothly transitions from the plane of the board up to the lead, **but don't use too much**. The finished joint should be smooth and shiny, not rough or gritty looking.

If you've never soldered a board with plated-through holes, you might be surprised to discover how difficult it can be to remove a component once you've soldered it in place. If you're using solder wick to correct a mistake, be very careful not to overheat the pads, since they will eventually delaminate and "lift". It's often better to sacrifice the component and remove its leads individually and start over with a new part. If for some reason you need to unsolder a multipin component (like a rotary switch or integrated circuit), remove as much solder as you can with solder wick or a solder sucker, and then use a small heat gun to heat all the leads simultaneously. With care, you can remove the component without damaging the board.


Instruction Conventions

Text in **orange** indicates a step where extra care needs to be taken. Doing it wrong isn't a disaster, but it'll need to be corrected.


Text in **red** indicates a step that **must** be done correctly. Doing it wrong will guarantee improper operation, and probably damage components and/or the circuit board.

Assembly


1. Before you begin, carefully unpack the kit and examine the parts. Check the contents of each small bag against the BOM to make sure all the parts have been included. If you think something's missing, please e-mail the details to sales@seventhcircleaudio.com and we'll ship replacement parts ASAP.
2. Generally, the idea when "stuffing" or "populating" a circuit board by hand is to start with the lowest profile parts, such as the resistors, and work your way up to the taller components. In each step below, insert the components, flip the board onto your work surface component-side down, and carefully solder and trim the leads. Use a piece of stiff cardboard to hold the parts in place while you flip the board. First, orient the board as shown.

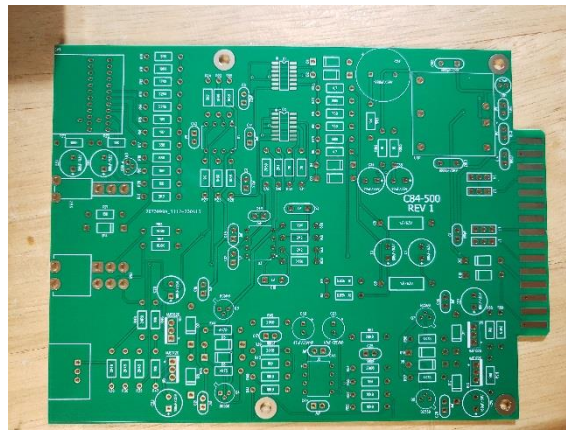


3. Before installing the resistors, prepare the leads using small needle nose pliers or a lead-forming tool as shown below. **Whatever you do, don't bend the leads at the resistor body and force them into the board.** This not only results in an ugly job, it can also damage the parts.

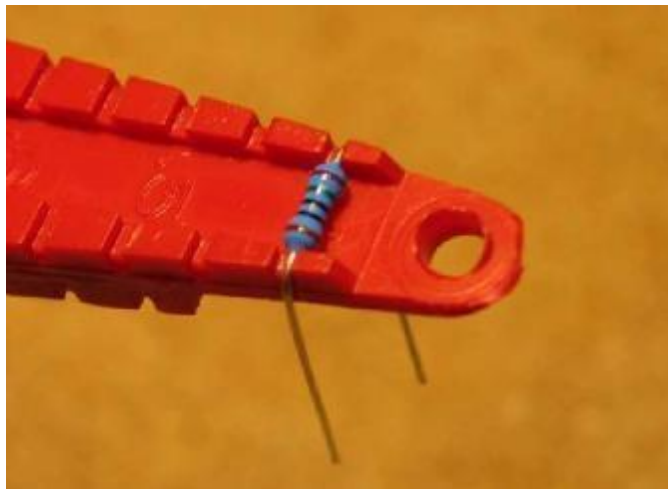


4. Insert the 1/4-watt resistors. Check the Bill of Materials (BOM) for help in reading the resistor color bands. It's also a good idea to actually measure each resistor with your DMM as you place it on the board, just in case you've decoded it incorrectly. Don't rely on the photos for component placement. **THE PCB PICTURES ARE NOT NECESSARILY THE CURRENT REVISION, sometimes not even the same model!!!** If the resistor value silk-screened on the board doesn't agree with the value on the schematic or parts list, follow the schematic.

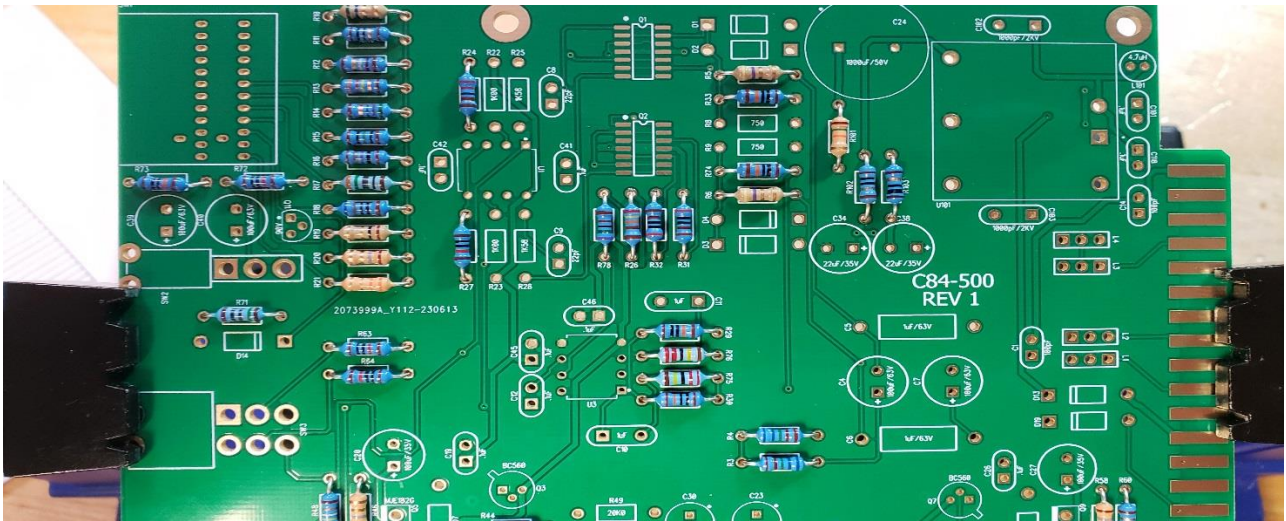


5. Next, add the protection diodes D1 through D19. **Diodes are polarized and must be installed the right way around!** The colored band on the diode matches the white band on the silkscreen.

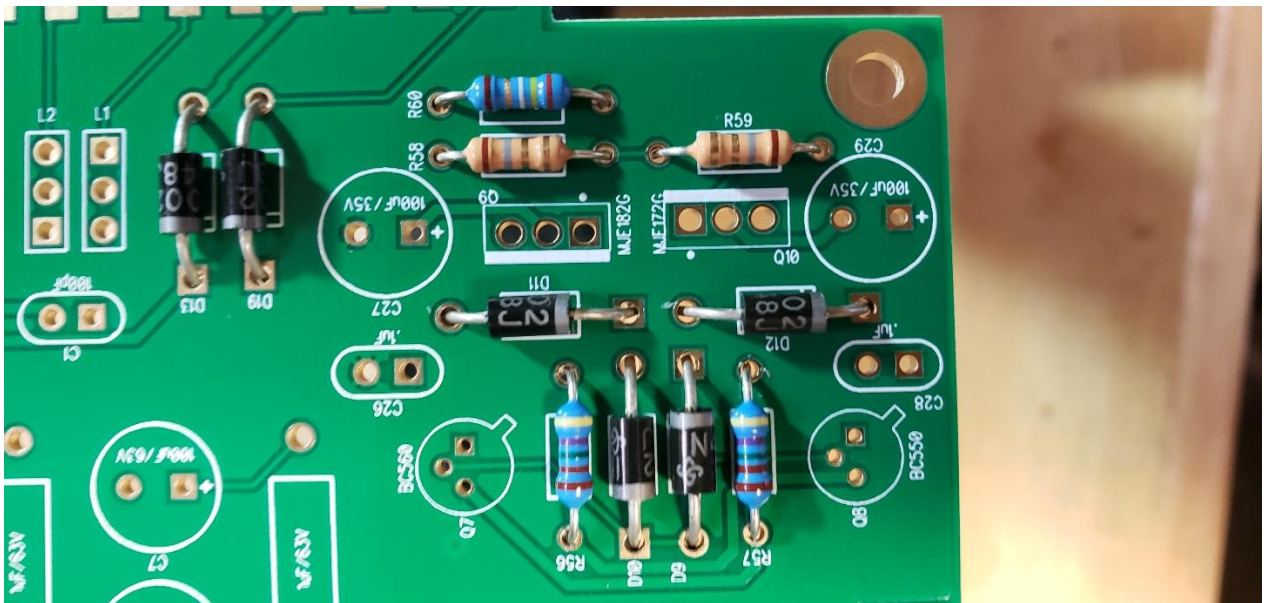


6. Add the small ceramic capacitors. These capacitors are not polarized and can be installed in either direction, **but pay close attention to the capacitor markings!** These parts all look alike, but they are not interchangeable. Putting one in the wrong spot will not prevent the preamp from passing signal, but it can seriously impair its performance.

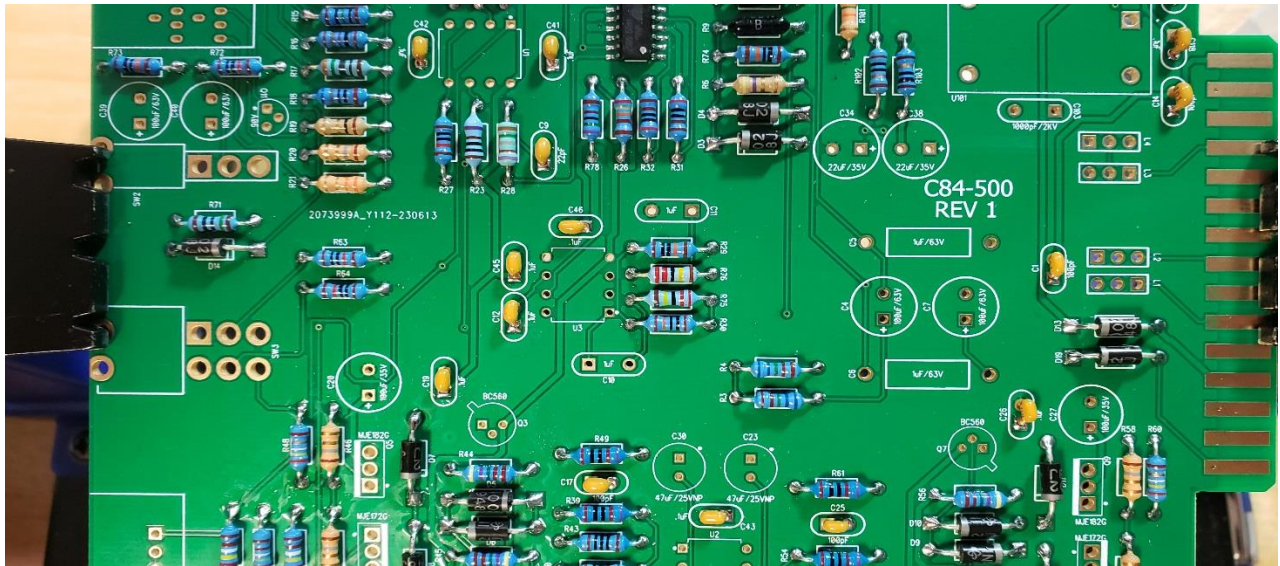


7. Install Q1 and Q2 now. Start by flowing a small amount of solder on two pads only as shown.

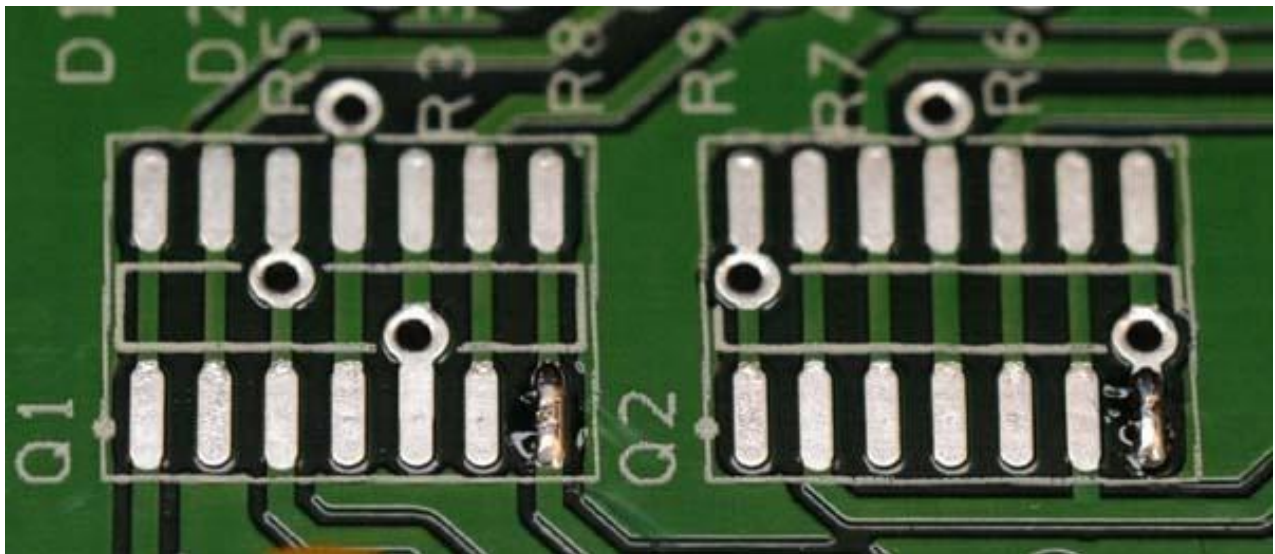


- Carefully position the part over the pads and re-flow the solder to tack it in place. **Pay close attention to the IC markings. Align the dot on the IC with the dot on the silkscreen outline!**

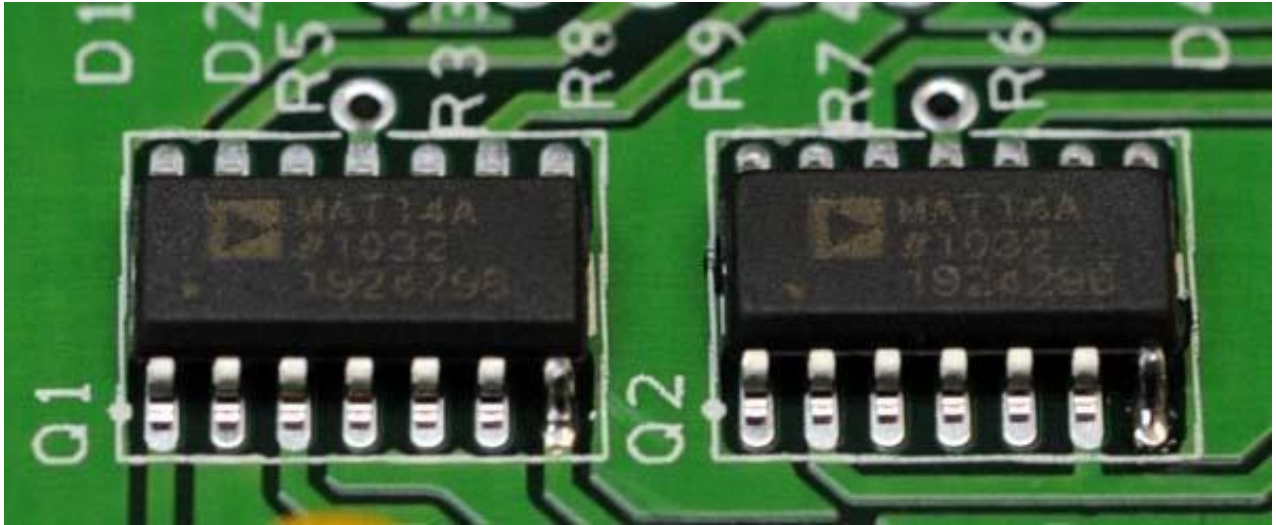


- Flow solder onto the rest of the pads. Use a flux pen or liquid flux for best results.

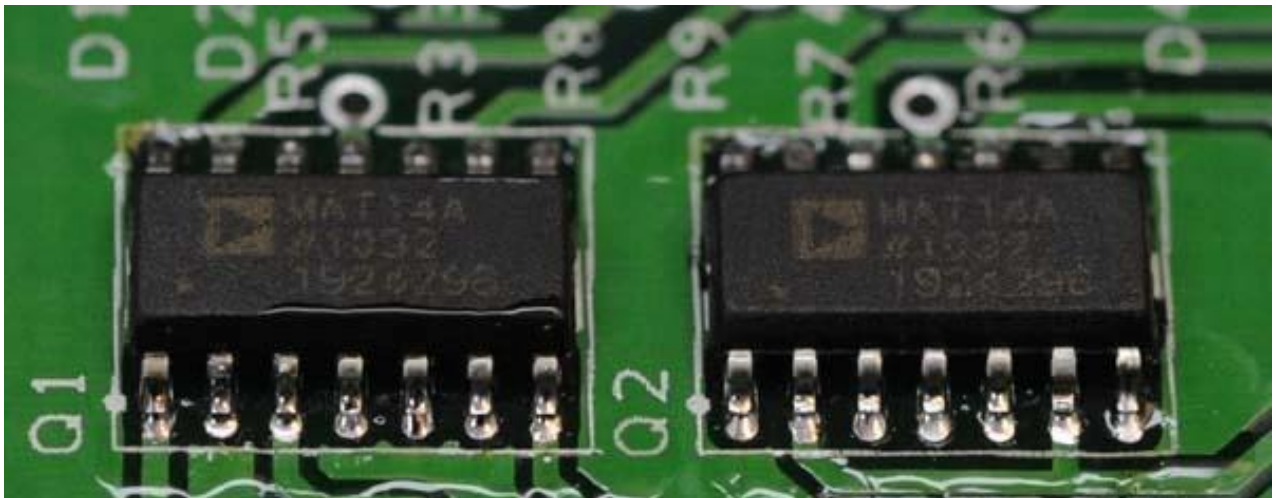


10. Install U1, U2, and U3 now. **Pay close attention to the IC markings. Align the notch on the IC with the notch on the silkscreen outline!** IC sockets are **not included** in the kit and are **not recommended**. Socketing the ICs will interfere with the ability of the PC board to conduct heat away from the parts.

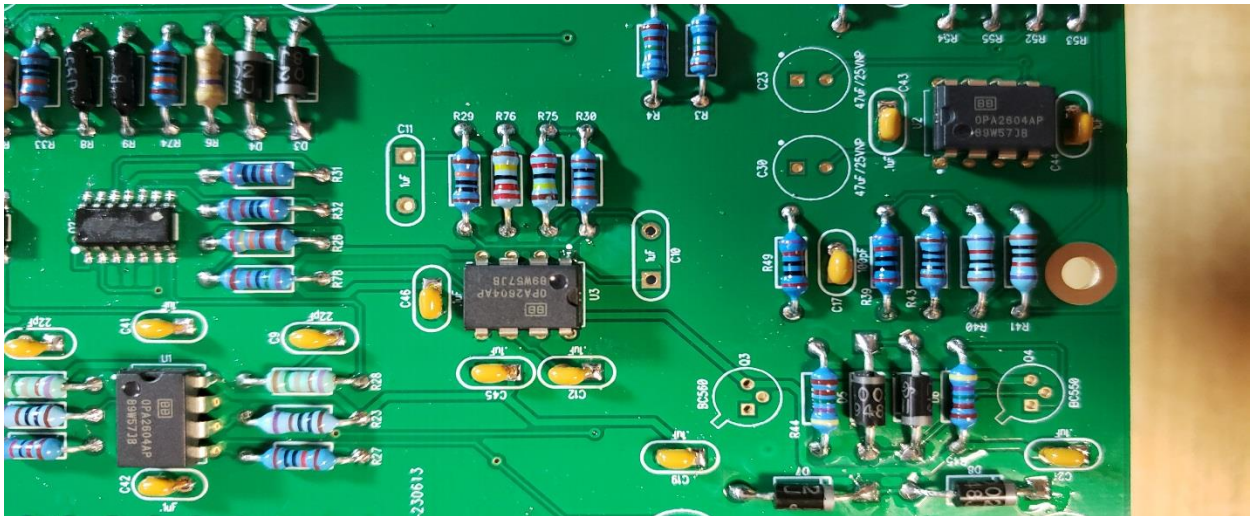


11. Install the blue filters, L1-L4, now. These parts are not polarized and can be installed in either direction.

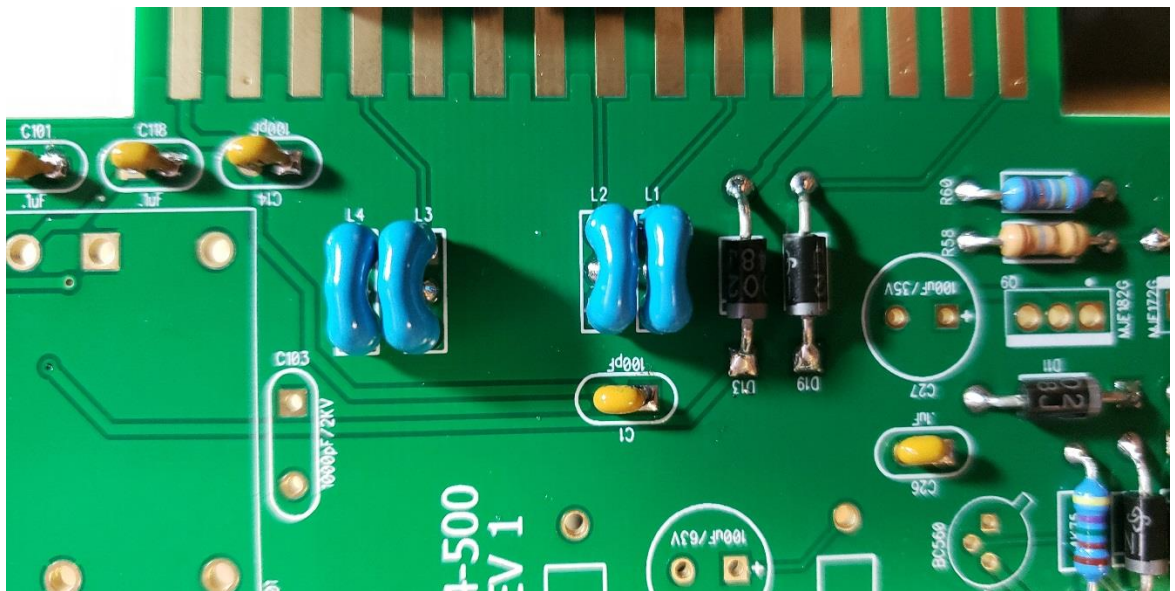


12. Install the 1uF film caps at C10 and C11. These parts are not polarized and can be installed in either direction.

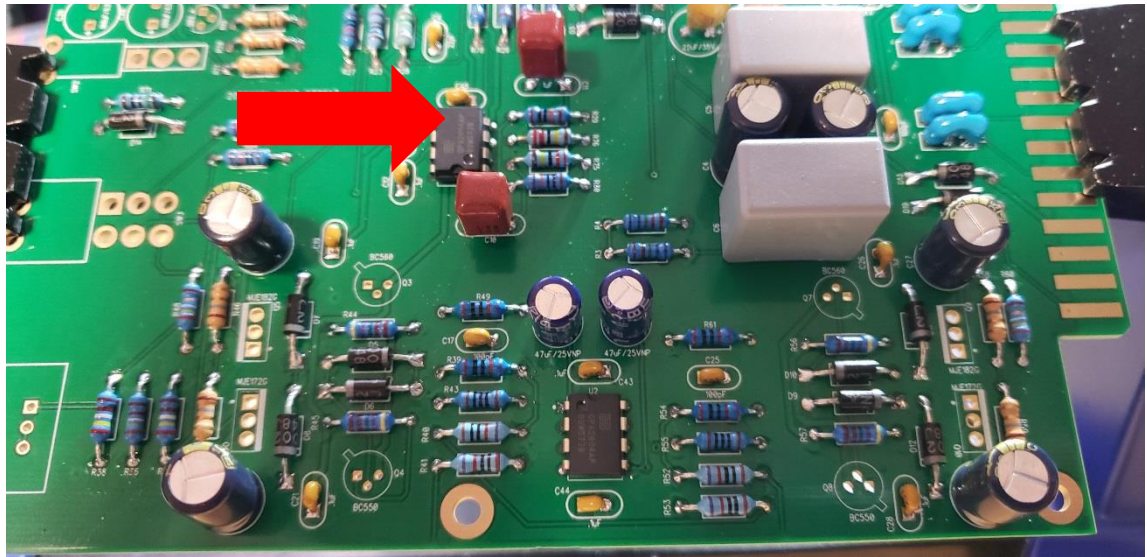


13. Add small transistors Q3, Q4, Q7, and Q8. These parts are not the same and are not interchangeable. **Align the flat side of the transistors with the flat side of the silkscreen outline.**

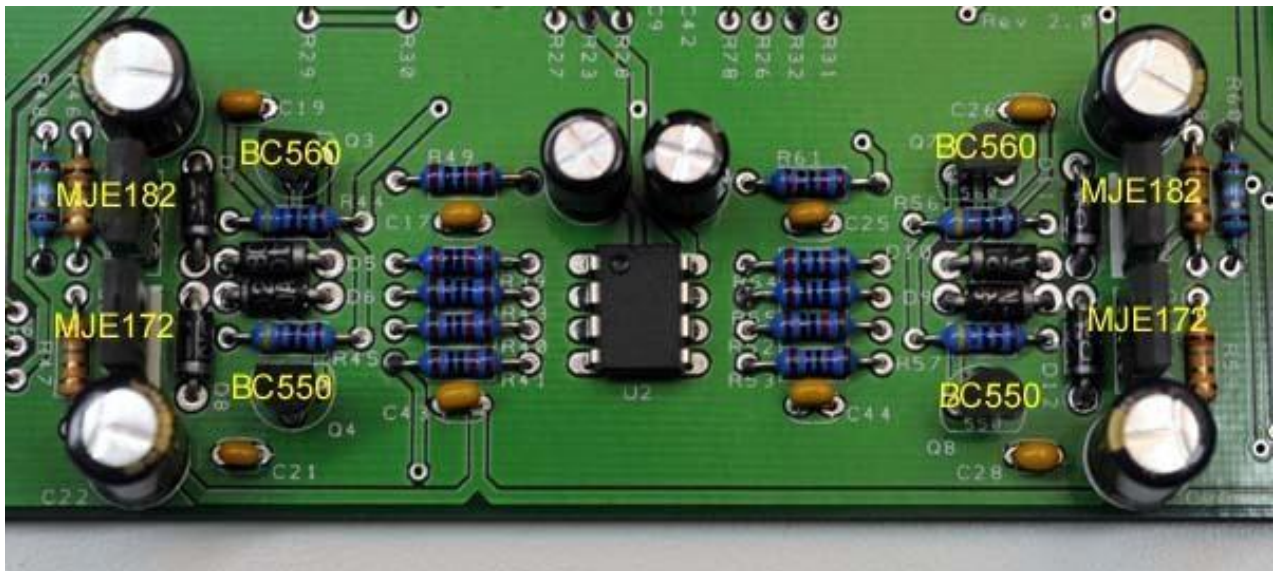


14. Add Q11. (Q12 IS NO LONGER NEEDED!) Again, these parts are not the same, and are not interchangeable. **Align the flat side of the transistors with the flat side of the silkscreen outline.**

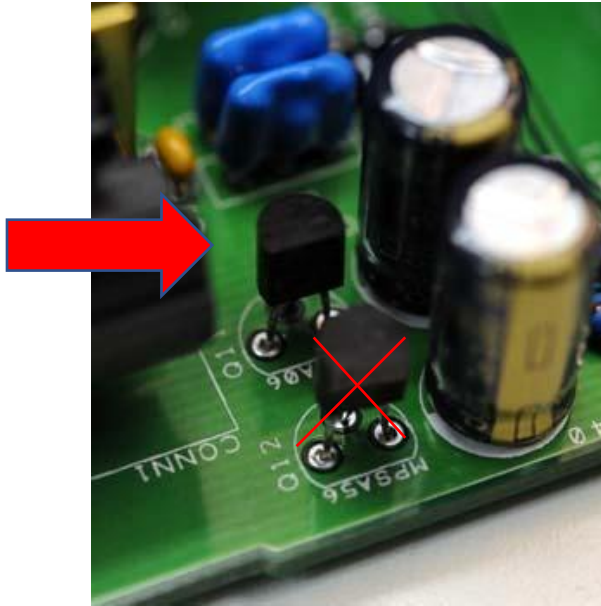

15. Add tantalum capacitors C34 and C38. **Tantalum electrolytic capacitors are polarized and must be installed the right way around!** Be absolutely sure to observe the correct polarity when installing these parts. The **positive leads** of the tantalum caps are marked with a small "+" sign. The **positive pads** on the circuit board are marked with a small "+" sign.

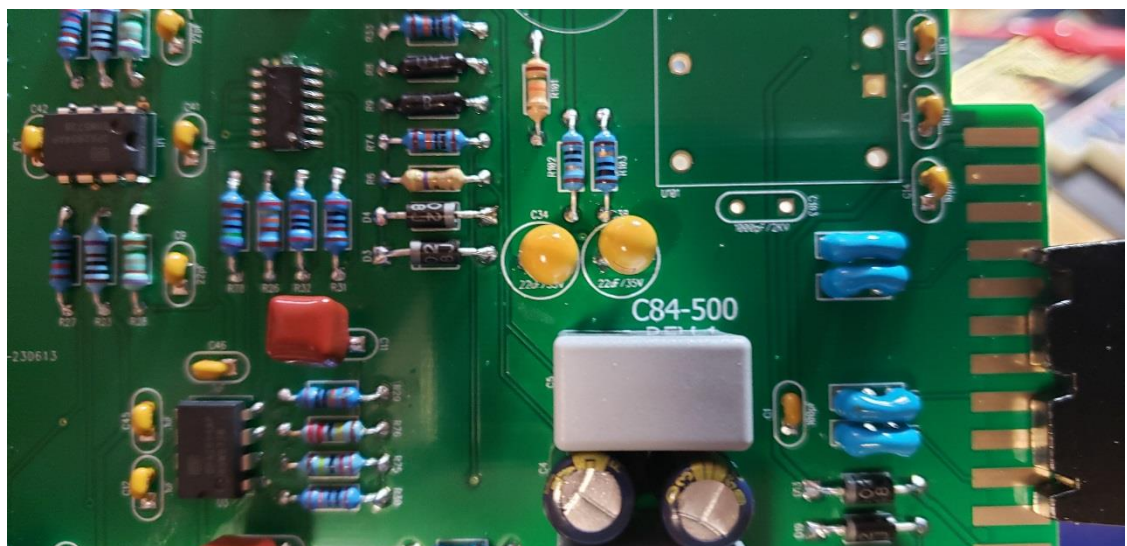


16. Add electrolytic capacitors now. C23 and C30 are not polarized, but the rest are **and must be installed the right way around!** Be absolutely sure to observe the correct polarity when installing these parts. The **negative leads** of the electrolytic caps are marked with a colored stripe. The **positive pads** on the circuit board are marked with a small "+" sign.

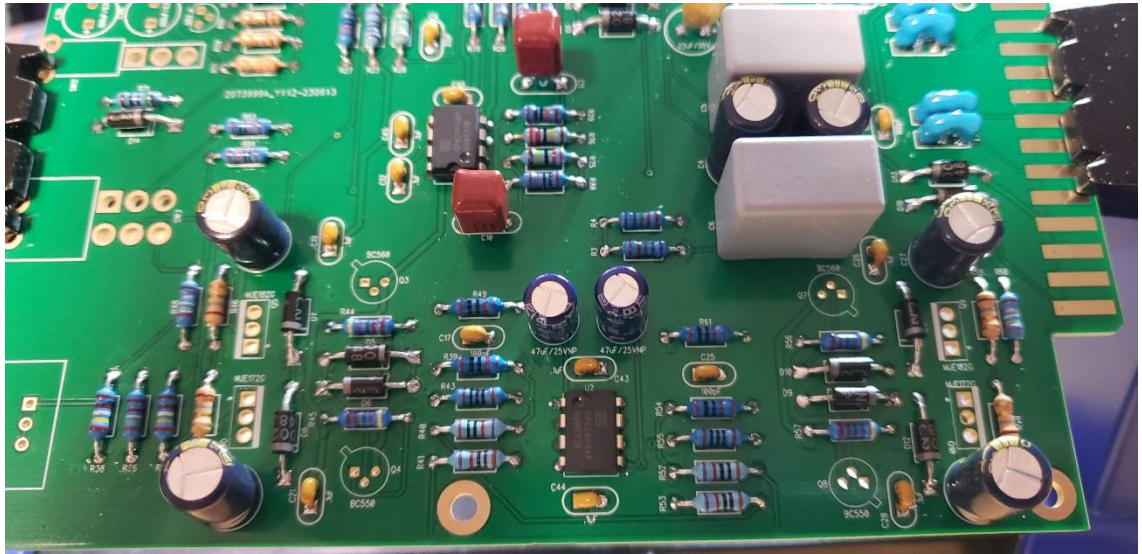


17. Add transistors Q5, Q6, Q9, and Q10. **Make sure to install the transistors correctly!** These parts are not the same and are not interchangeable. The heavy line on the silkscreen outline indicates the **back** of the transistor, the side **without** markings. **Make absolutely sure you don't insert them backwards.**




18. Carefully mount the toggle switches SW2 and SW3. Be sure they're seated flat on the board before soldering all the pins. You may find it easier to solder the first pin with the board component side up.

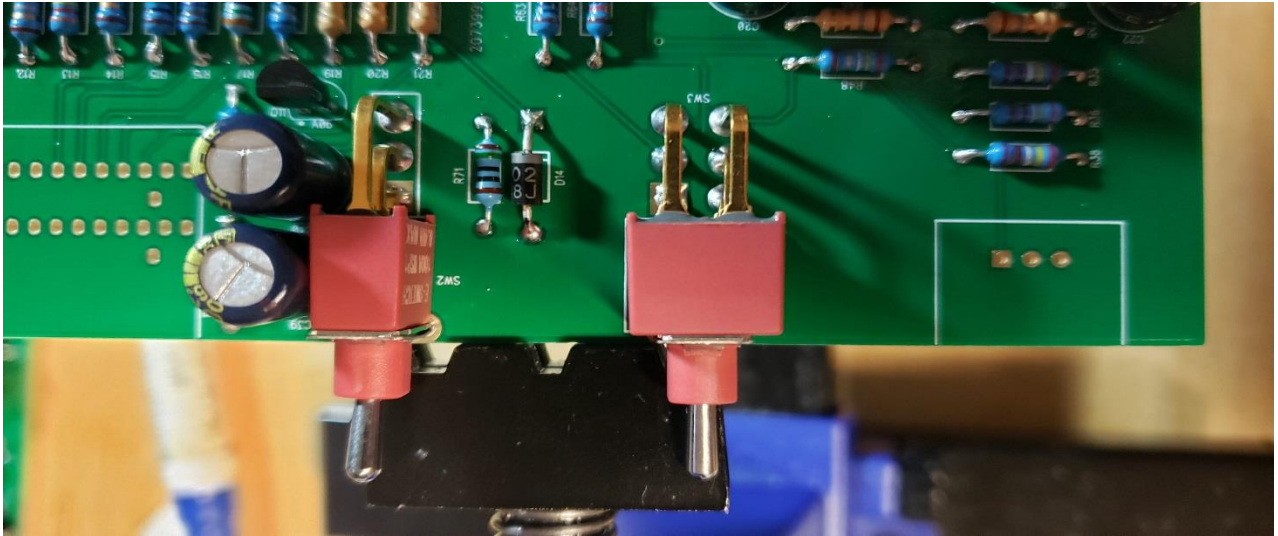


19. Add large capacitors C5 and C6. Be sure to not overheat the leads, as these parts are susceptible to damage from excess soldering heat.

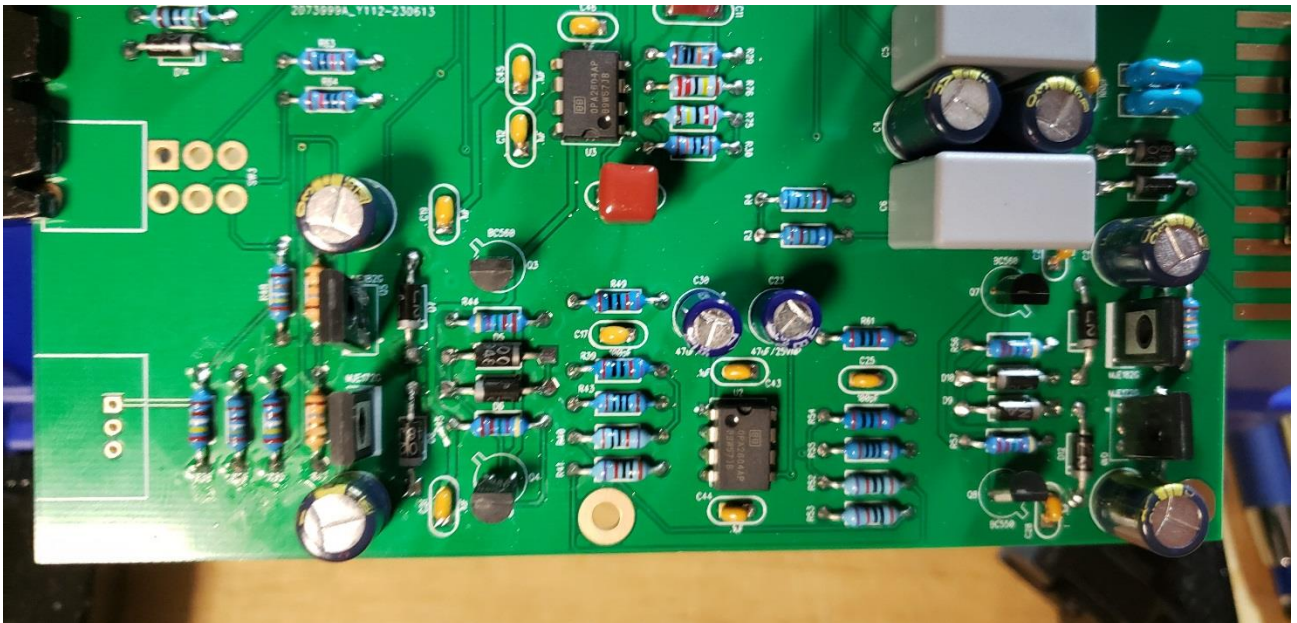


20. Install rotary switch, SW1. Make sure the switch is fully seated and solder it to the board. Try to make your solder joints as neat as possible, and don't use too much solder.

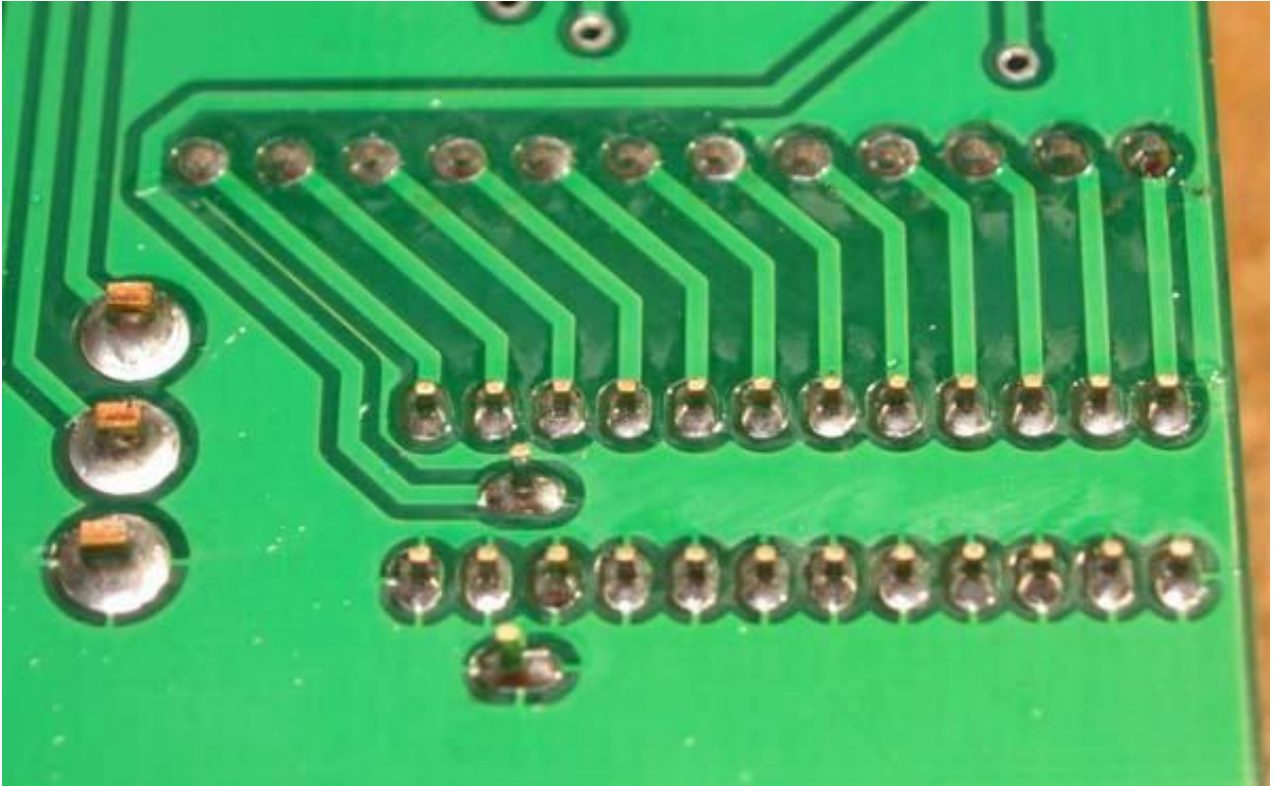

21. Attach gain trim control R37. Make sure the control is seated flat to the board before soldering the leads.

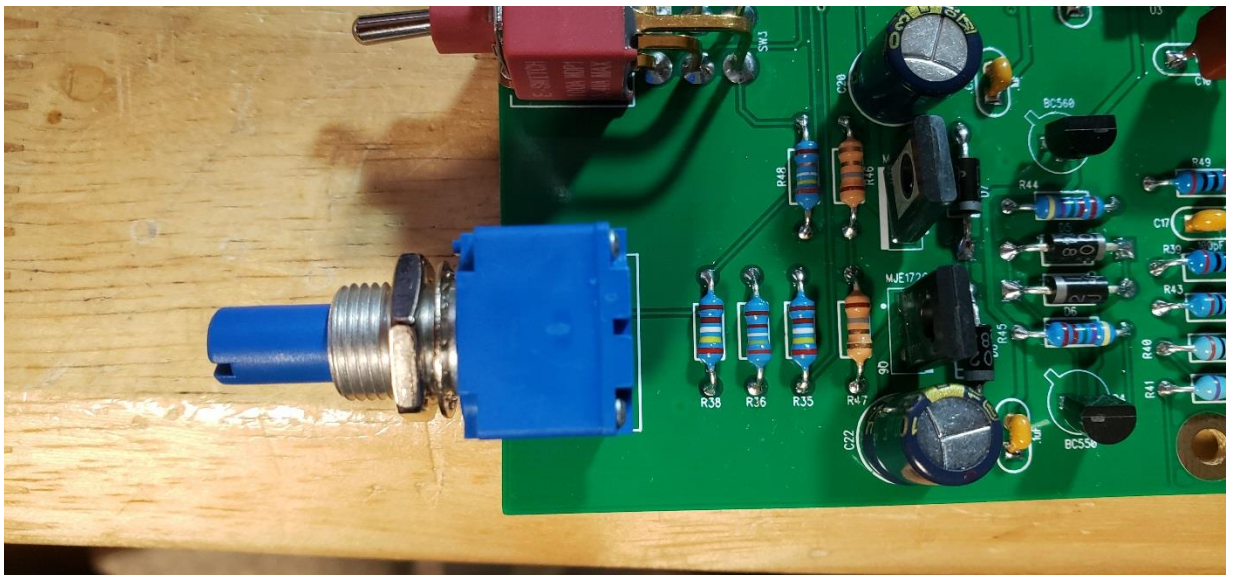

- 22.** Install the bulk filter capacitor C24 as well as other power supply parts. Be **EXTRA CAREFUL** not to leave solder shorts on these components!

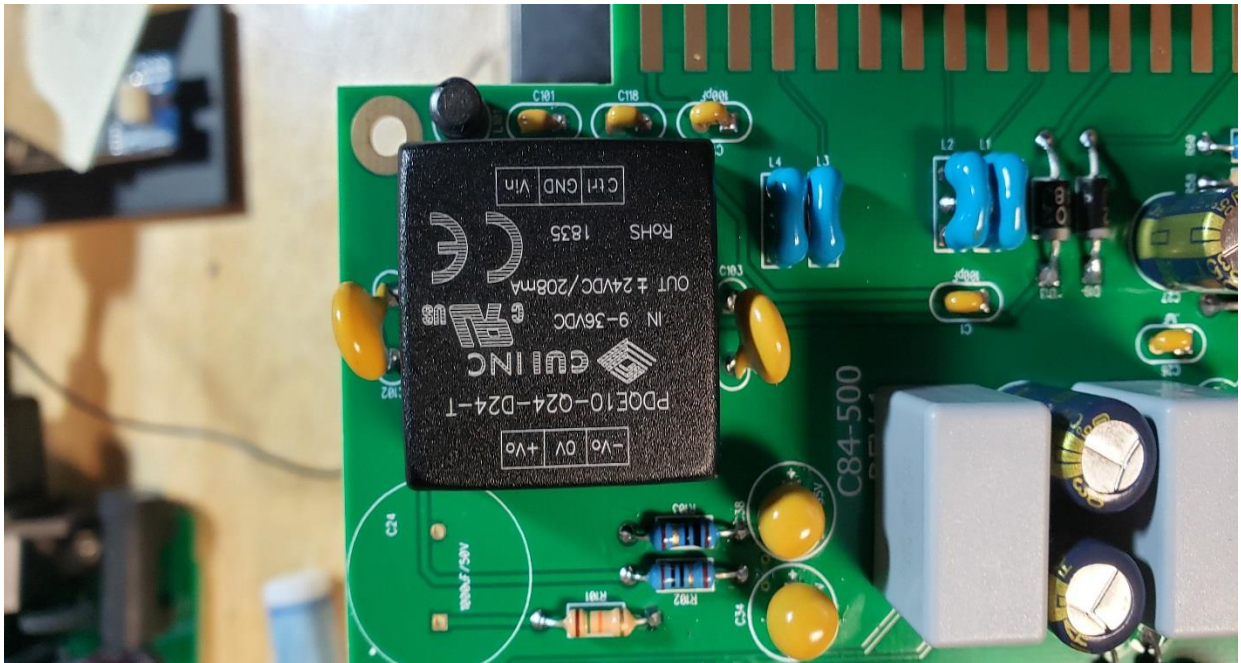

- 23.** Before going on to initial power-up, carefully check your work. Make sure you haven't created any solder bridges between pads, or between a pad and the ground plane.


Initial Power-Up and Testing

- 24.** Again, carefully check your work. Make sure you've got the right resistors in the right locations. Make absolutely sure you've got all the transistors, diodes, and capacitors soldered in the right way around! Double check to make sure you haven't inadvertently swapped a transistor or voltage regulator. Check for poor solder joints and solder bridges, and make sure you fix any problems before continuing.
- 25.** Set your DMM to measure DC voltages of 20V or greater and turn on the power. Measure the voltage across C34. You should see about +23V.
- 26.** Measure the voltage across C38. You should see about -23V.
- 27.** If the voltages measured in the two previous steps are off by more than a volt or so, you have problems.


28. Verify that the common mode servo is working by measuring the voltage at Pin 6 on U3. You should see a voltage within a few millivolts of 0V.

29. Verify that the differential mode servo is working by measuring the voltage between Pin 1 and Pin 7 on U1. You should see a DC voltage below 50mV.

30. Verify that the output buffer is working by measuring the voltage between R63 and R64 as shown. The voltage should be similar to what you measured in the last step.

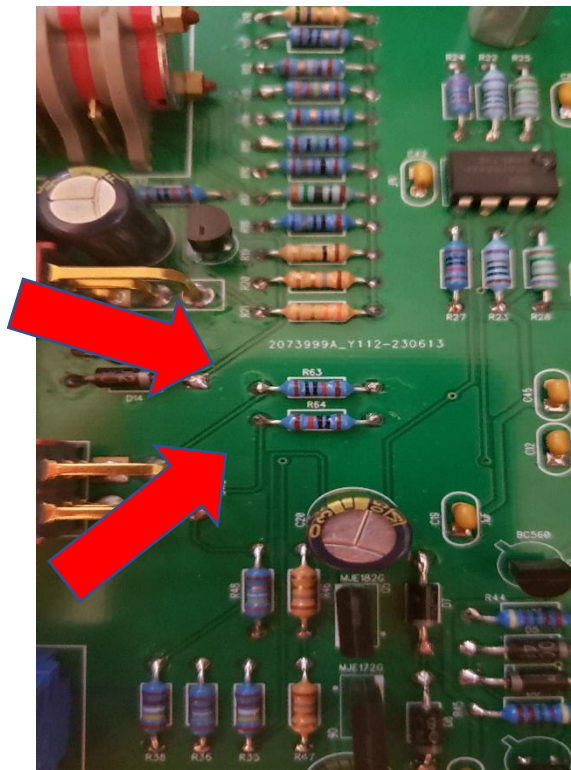

Installation into 500 series case

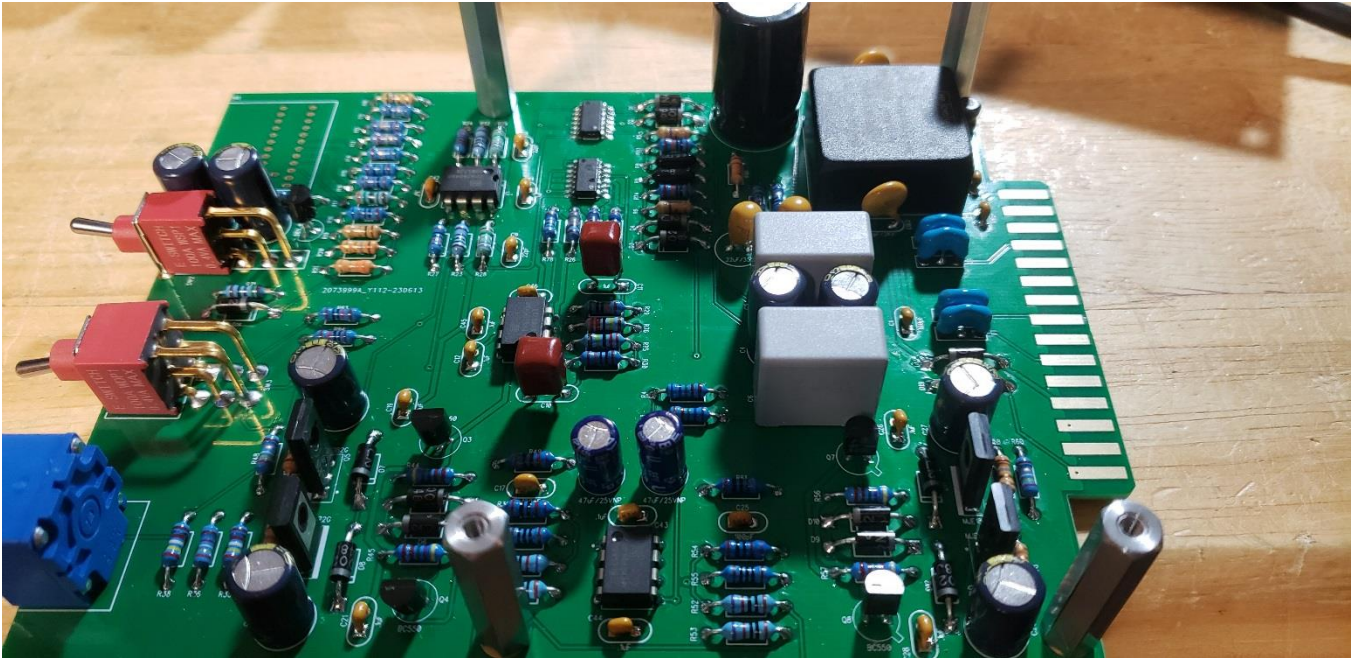

1. Make sure all 4 standoffs/spacers are installed. Short M-F spacer on the bottom, long on top of the PCB.
2. With nuts and washers from rotary switch and gain trim removed, fit the switches through the holes on the bottom tray. You can throw away the washers, but keep the nuts for the faceplate! The toggle switches may need to be pressed to the side to fit. If one is too far off, use the solder iron to reflow and straighten!




3. Use 4 small flat head screws to secure PCB to bottom tray.



4. Install cover using 4 small flathead screws.



5. Attach faceplate using the nuts, but NOT the washers! Add knobs to the front

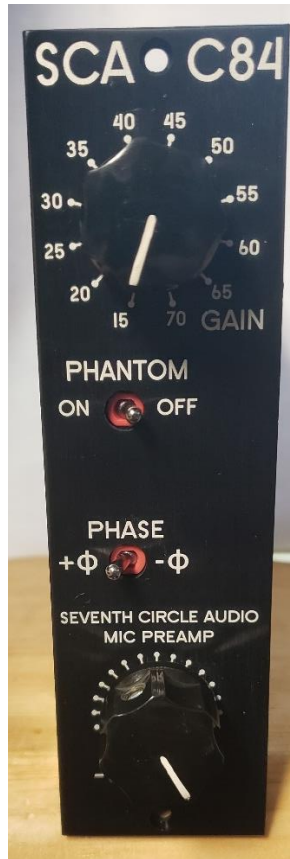

6. Congratulations! You have completed your build!